




SHELL KIT INSTALLATION GUIDE

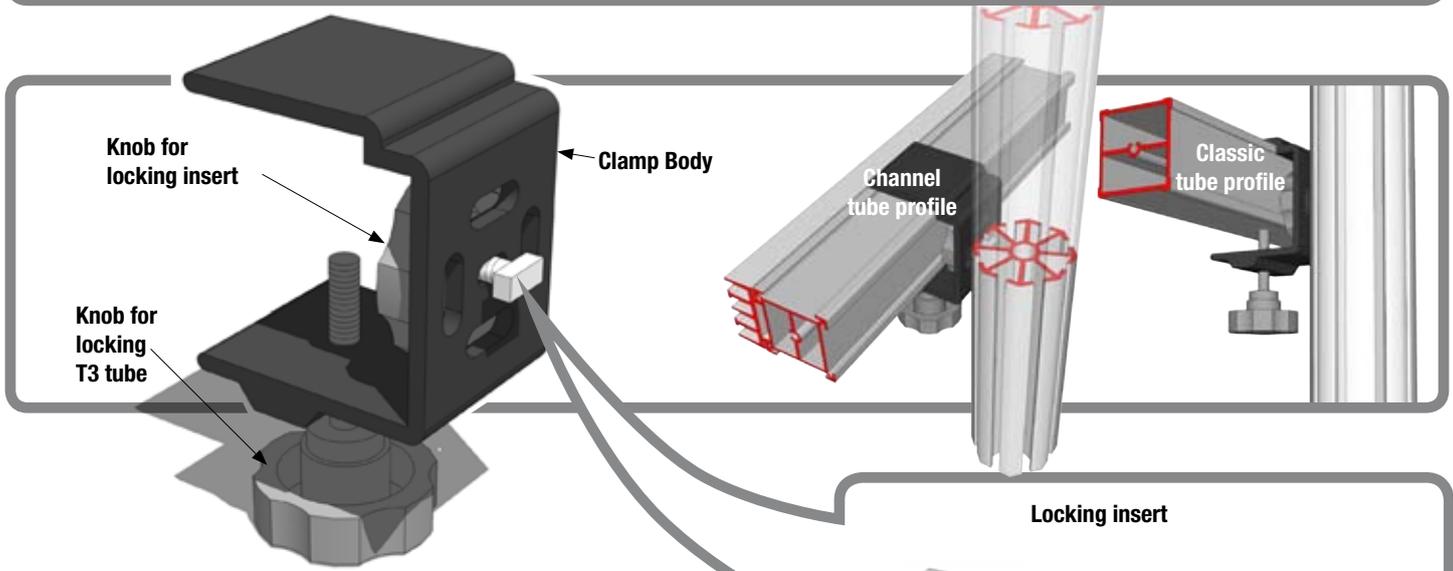

FITTING THE T3 SHELL KIT TO AN EXHIBITION/DISPLAY WALL

Integrating T3 walls and structures within shell schemes is easy with the T3 Shell Kit Clamp.

The clamp fits all the major exhibition and event divider systems including Octanorm, Foga, Modul, Syma, Unibox and Click and can be used with both Classic and Channel T3 tubes.

This makes it possible to create custom-looking displays with fabric, flexible and rigid panels quickly, easily and very cost effectively.

Locking insert



SMALL INSERT
For OCTANORM
(Supplied as standard fitted to clamp)




MEDIUM INSERT
For FOGA, MODUL, SODEM, SYMA and UNIBOX
(Supplied separately with clamp)



LARGE INSERT
For CLICK
(Supplied separately with clamp)


Locking inserts are interchangeable and allow fixing of the T3 Shell Kit Clamp to all the major aluminium profile exhibition systems.

01

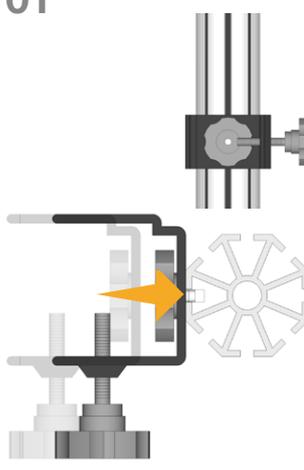


Starting with the clamp at 90° to its finished position, place the locking insert into the channel of the shell scheme upright. **Make sure the insert is able to rotate in the channel.**

02

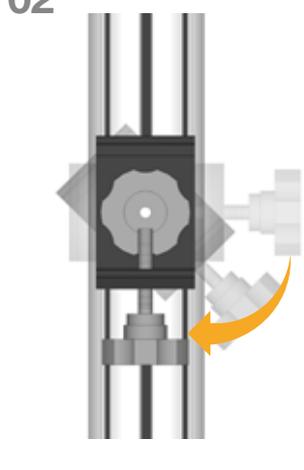


Turn the clamp 90°. The locking insert will now hold the clamp to the upright.

03

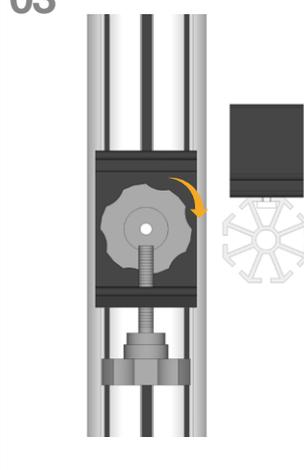


Tighten the knob for the locking insert to secure the clamp in position on the upright.

04

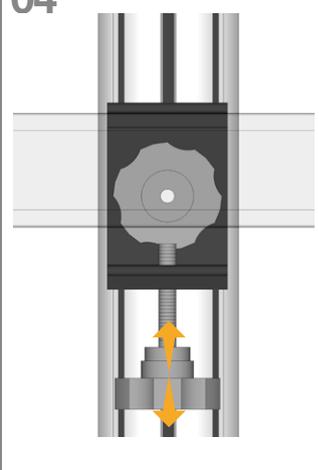

The T3 tube can now be positioned in the clamp and held by tightening the second knob.

CREATING A T3 WALL

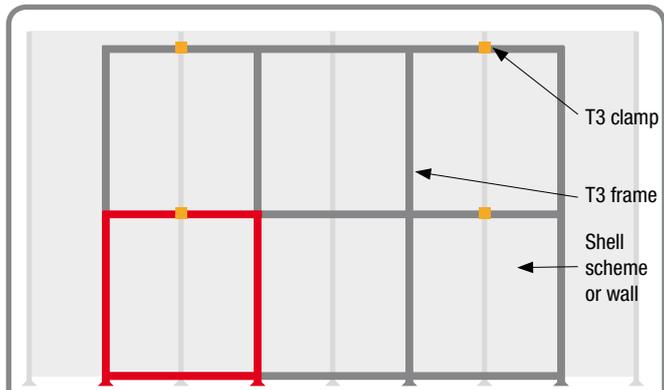

Floor standing T3 walls

Start building the T3 structure constructing the first square at either bottom corner. Using the T3 clamp, locate the T3 to the shell scheme. Construct the remaining frame securing the frame to the shell scheme using the remaining clamps.



STEP 1. Build the T3 frame.



STEP 2. Attach the first graphic.



STEP 3. The finished wall.

CREATING A FLOATING T3 DISPLAY PANEL


STEP 1. Build the T3 frame.



STEP 2. Attach the graphic.



STEP 3. The finished panel.

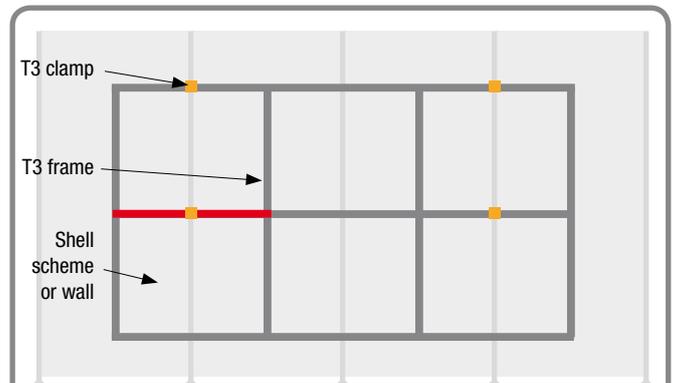


"Floating" T3 display panels

Start building the T3 structure by fitting one of the middle horizontal tubes. It is important that this tube is level before tightening the clamp.


Don't forget that the T3 frame or panels can be easily repositioned or adjusted by releasing the clamps and sliding the T3 into the new position.

FITTING THE T3 SHELL KIT TO A SOLID WALL OR PANEL (i.e. brick, concrete, plaster or timber)

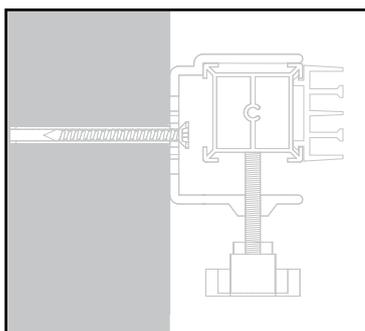

The T3 Clamp also provides a quick and simple way of fixing a display framework to existing walls of all types.

01



Remove the locking insert and knob.

02



Fix to the wall or panel through any of the 5 slots in the back of the clamp.